

P-480

POLYQuik P-480 has the ability to coat, seal and waterproof anything made of concrete, wood or metal. This two-component, polyurea formula is sprayable, which makes it extremely easy to apply.



P-480 Benefits

This product can be used on a variety of applications, including wood, metal and concrete. Once sprayed it sets in seconds and forms a virtually impenetrable barrier over the coated surface. P-480 is perfect for waterproofing or protecting from corrosion. It is resistant to many chemicals, including hydrogen sulfide, acids and hydrocarbon solvents. The POLYQuik Division of WVCO is an original equipment manufacturer (OEM). As an OEM, the division has successfully developed robotic equipment for automated application of P-480. Depending on your needs, the product can be applied in the field or in the plant. One gallon of product can coat approximately 26 square feet and when stored properly, it has a shelf life of one year.

Spray Polyurea Coating

P-480

Where to use P-480

- Primary and secondary containment
- Waterproofing – above or below grade
- Wastewater confinement
- Protective coatings – ability to protect wood, concrete or metal surfaces




P-480 is an excellent coating for primary and secondary containment applications.

What you can expect from P-480

- Excellent crack bridging
- Sets in seconds
- Reduction of facility downtime
- Superior chemical resistance

Packaging

100 gallon drums
10 gallon kits

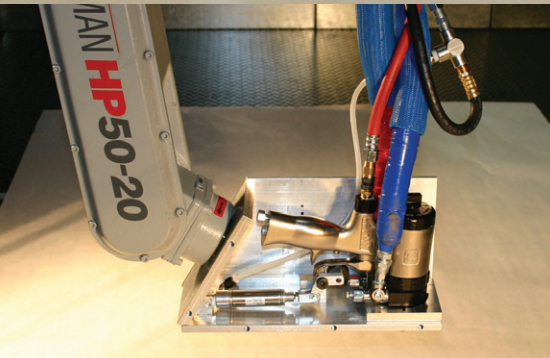

Automation is a perfect match for OEM applications of P-480.